



Development of Power Operated Portable Sesame Thresher for Small Farmers

P. Dhananchezhiyan^{1*}, M. Venkatesh¹, M. Vanitha¹, D. Thamizhagan¹
and S. Theliban¹

¹Agricultural Engineering College and Research Institute, Tamil Nadu Agricultural University, Kumulur,
P.O.B. 621712, Tamil Nadu, India.

Authors' contributions

This work was carried out in collaboration among all authors. Author PD designed the study, performed the statistical analysis, wrote the protocol and wrote the first draft of the manuscript. Authors M. Venkatesh, M. Vanitha, DT and ST managed the analyses of the study and managed the literature searches. All authors read and approved the final manuscript.

Article Information

DOI: 10.9734/AIR/2019/v20i430165

Editor(s):

(1) Dr. Zakaria Boumerzoug, Professor, Department of Mechanical Engineering, University of Biskra, Biskra, Algeria.

Reviewers:

(1) Sunil Kumar, Banda University of Agriculture and Technology, India.
(2) Subrata Kumar Mandal, CSIR-Central Mechanical Engineering Research Institute, India.
Complete Peer review History: <http://www.sdiarticle4.com/review-history/53798>

Original Research Article

Received 27 October 2019
Accepted 02 January 2020
Published 09 January 2020

ABSTRACT

Threshing of sesame seeds from the harvested capsules is one of the important operations and it consumes more labor, time and cost. Hence the development of a power operated portable sesame thresher is timely essential for the small farmers. The physical properties of sesame seeds namely size of the seed, Number of seeds per capsule, 1000 grain weight and length and thickness of capsules were studied for developing a power operated portable sesame thresher. The most popular variety used in Tamil Nadu is TMV 7. The average length and thickness of capsules were measured as 35 and 12 mm respectively. The average number of seeds in single capsule was determined as 60. The average 1000 grain weight was determined as 3.1 g. and the average size of the seed is 3×1.8× 0.9 mm. Based on these results the portable sesame thresher was fabricated based on double roller (two rollers are rotating with opposite direction) mechanism with an overall size of 1392 ×700 ×1170 mm and its performance was assessed in terms of threshing efficiency, output capacity, saving in cost and time and compared with conventional methods of manual threshing. The developed portable power sesame thresher was field tested and its threshing efficiency and seed output capacity were 96.7% and 18.2 kg h⁻¹, respectively. The saving in cost and time were 92 and 72% respectively as compared to conventional method of manual threshing.

*Corresponding author: E-mail: dhananchezhiyan.p@tnau.ac.in, kpdhana@gmail.com;

Keywords: Sesame; thresher; roller; threshing efficiency; output capacity.

1. INTRODUCTION

In India sesame is largely produced for its oil and seeds oil content around 55%. India's annual average production float around 6, 80,000 metric tonne contributing to around 22% of the world's total sesame production. According to Ministry of Agriculture, Tamil Nadu, sesame was cultivated in 0.66 lakh hectares with a production and yield of 0.36 lakh tonnes and 596 kg/ha respectively during 2014-15 [1]. About 65% of the annual sesame crop is processed into oil and 35% is used as food. The crop is cultivated twice a year, during December - January and July - August. Among all the cultivation practices of sesame crop, threshing and harvesting is sensitive and tedious operation. Threshing is the detachment of the sesame seeds from the capsule of the sesame plant. Threshing was recognized to be a very labor intensive operation and involve considerable human drudgery. Manually it can be done by hand beating and results in high time of operation and high losses than the mechanical method also further, delay in threshing operation, results in delay in sowing of the next crop and hence it reduced the yield. The available thresher requires high horsepower motor or PTO of tractor. Hence during threshing one tractor owned by the farmer is not available for other farm operations such as seedbed preparation. The existing thresher cannot be taken to the interior fields of the farmer where we do not have proper approach roads to the fields. Keeping in view of the problems arising in threshing of sesame, the portable sesame thresher was developed. It can be taken by two persons to any corner of the interior sesame fields. The prime mover is engine/electric motor driven 2.2 kW engine.

The physical properties of sesame seeds related to threshing mechanism were studied. According to Zebib, et al. [2] the average values of 1000 seed weight were ranged from (2.74-3.16 g) and true density from (1190.66 to 1215.58 kg m⁻³). Darvish, [3] state that the average length, width and thickness from 3.019 to 3.074 mm, 1.844 to 1.935 mm and 0.724 to 0.771 mm respectively and the angle of repose range from 20.16° to 28.67°. Yilmaz, et al. [4] stated that a rasp bar with tooth type threshing drum with three speeds of 6.5, 9.1 and 11.7 m/s, three feed rate as 90, 180 and 270 kg/h and three concave open as 20, 35 and 50 mm were used in this study. Results show that the best performance for separation of

sesame straw were gave at the maximum drum speeds, minimum feed rates and concave opens. Hyun, [5] developed a machine for separating shatter-resistant sesame after threshing. He used a sieve perforation size of 5 mm and blower speed of 220 rpm given an optimum separation and loss ratios, of 96.5% and 3.5%, respectively. Olugboji, [6] developed rice thresher has the ability to winnow the premature grains and leaves and calculated the total power required to comb off grains from stalk is 267.04 W and to be driven by a 1.5 hp electric motor.

Abhishek and Stevens, 2016 [7] stated that the maximum threshing efficiency for gram was found to be 98.98% at cylinder speed of 600 rpm and feed rate 20 q/h. The output capacity was found 9.62 q/h at cylinder speed of 600 rpm and feed rate 20 q/h. Lee, et al [8] measured the shattering ratio by developed machine was 97.2% and the work hour per area of 10 acre for the mechanical work and the manual work were 0.3 hour and 13.9 hour, respectively. Tiwari, et al. [9] reported that the small light weight power threshers (0.75 kW) have been developed for hilly region states. The axial flow threshers for sunflower, groundnut, soybean, rice and wheat are commercialized across the country. Naik, et al. [10] designed a pedal-operated paddy thresher and evaluated for optimal design parameters, viz., wire loop spacing 39.1 mm, wire loop tip height 60.6 mm and threshing drum speed 339.46 m min⁻¹. The corresponding threshing capacity and efficiency were 64.6 kgh⁻¹ and 96.4% respectively.

2. MATERIALS AND METHODS

2.1 Physical Properties

The crop parameters influencing mechanical threshing of sesame seeds were identified and determined. The crop properties, relevant to the design of thresher components were identified as the length and thickness of capsule, Number of seeds per capsule, size and shape, thousand seed weight, test weight and angle of repose. The most popular variety among the farms of Tamil Nadu TMV 7 was used throughout the investigation. Length of capsule: One sesame capsule was selected at random from the harvested heap and its length and thickness was measured with a scale after placing it on a horizontal platform in its natural rest position. This procedure was repeated for nine more capsules of sesame and the observations were

recorded. The moisture content of the capsule was determined by OSAW moisture meter.

Number of seeds per capsule: Ten number of sesame capsule was selected at random. The seeds in the capsule was separated manually and counted. **Size and shape of seed:** The size and shape of the seed are important parameters in designing the rollers and sieves. The size and shape of TMV 7 variety were determined by digital vernier caliper having the accuracy of 0.02 micron. Twenty seeds were selected in random. **The sesame seeds have an ellipsoid shape with three main dimensions, the length (longitudinal dimension), the breadth (dorsoventral dimension) and thickness (lateral dimension).** **Thousand-grain weight:** The weight of thousand grains randomly selected from a heap of sesame crop was weighed in an electronic weighing balance having a sensitivity of 0.1 g the experiment was replicated ten times and the observation was recorded. **Evaluation of existing practices of sesame threshing and comparison:** The conventional method of threshing sesame involves drying the crop in the field itself for 6-8 days. After that the crop was harvested and threshed in the field using a stick. The beating action shreds the seeds from the capsules. The threshed seeds are cleaned using manual sieve.

2.2 Development of Power Operated Portable Sesame Thresher

A power operated sesame thresher was developed with the following components; the main frame was made up of mild steel 'L' angle. It is supporting the different components of thresher such as feed chute, threshing rollers and sieves. An inclined feed chute was fitted at one end of the roller. The shape, slope and size were fabricated as per the IS standards for uniform feeding of crop in to the rollers. The thresher was mounted with a wooden roller and mild steel roller. The roller of 200 mm diameter and 350 mm length supported by a shaft fixed to the main frame of the thresher with the help of bearings. One end of the shaft is fitted with a stepped V- belts and pulley, to throw the threshed materials at the outlet. The primary outlet 616 mm is used to collect the threshed grain and Secondary outlet is to throw the threshed straws. Separation unit consists of three layers of sieve openings (respectively 7 mm, 5 mm, and 3 mm) to separate the sesame seeds from the straws and impurities. It was connected to the shaft of the pulley using cam which gives reciprocating movement to the

separation unit. A One hp electric motor or engine is fitted to the threshing unit at an appropriate place. Provision is made at the base point to move the engine to and fro to create a belt tension with the help of V-pulley and belt. The overall dimension of the power operated sesame thresher is 1392 ×700 ×1170 mm (Fig. 1).

2.3 Performance Evaluation

The thresher with a stationary roller and a moving roller was evaluated to study the threshing performance by crop and operational parameters. The variables affecting the performance of the thresher were the crop moisture content, feed rate, roller speed and clearance between rollers. The analysis was carried out to determine the roller speed and clearance between rollers to get maximum threshing efficiency, output capacity and minimum grain damage. The standard peripheral speed of drive roller 7.5 ms^{-1} should be selected to give maximum threshing efficiency, minimum damage and high output. The thresher was operated for a period of six hours and the performance was evaluated following the test procedure described by IS: 11234:1985 [11].

Output capacity: The output capacity was estimated by weighing the total grain received per hour at primary output of the thresher.

$$\text{Total grain output } A = B + C + D$$

Where,

A = Total grain input per unit time by weight .

B = Weight of threshed grain per unit time collected at the main grain outlet.

C = Weight of threshed grain per unit time collected at all outlets except from main grain outlet.

D = Weight of unthreshed grain from all outlets per unit time.

Threshing efficiency: The percentage threshing efficiency was estimated using the following equation. (RNAM, 1983).

Threshing efficiency, % = $100 - \text{Percentage of unthreshed grain}$.

$$\text{Percentage of unthreshed grain} = (H / A) 100$$

Where, H = Weight of unthreshed grain per unit time at all outlets.

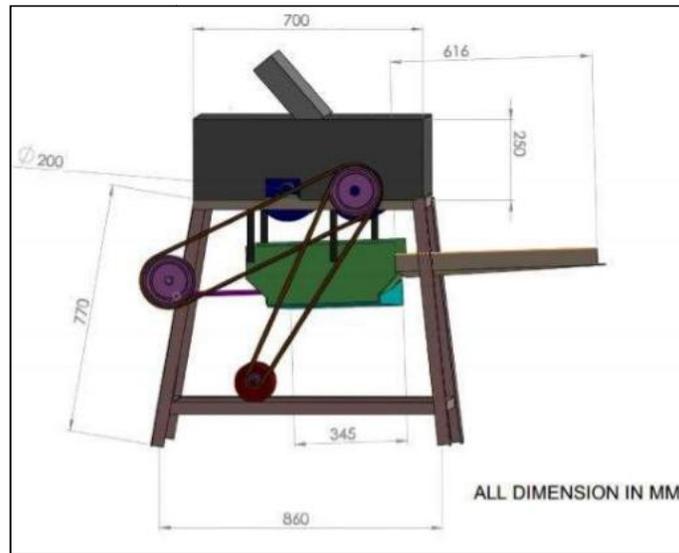


Fig. 1. Power operated sesame thresher



Fig. 2. Threshing mechanism-drive (Wood) and driven (Iron) rollers



Fig. 3. Power operated portable sesame thresher

Table 1. Levels of variables for thresher

Threshing cylinder	Feed rate (R), kg/h	Roller clearance (C), mm	Moisture content (M),% (dry basis)	Affected response variables
Double roller	140	5	13.5	Threshing efficiency
mechanism Driven (Iron) & Drive roller (Wooden)	180	10	16	Output capacity
	220		18.5	

2.4 Cost Economics

The total cost of the power operated sesame thresher was arrived and fixed and variable costs for operating the unit per hour was calculated as per the procedure described by BIS IS 9164: 1979 [12,13,14]. From the field capacity of the unit, the cost of operation per 100 kg of grain was calculated. This cost was compared with conventional method of threshing cost for threshing 100 kg grain. The saving in cost and time using the power operated sesame thresher was arrived.

3. RESULTS AND DISCUSSION

The physical properties of TMV 7 sesame variety were analyzed. The performance of threshing systems under different sesame moisture content, feed rate, roller speed and clearance between rollers was obtained. Length and thickness of capsules, Number of grains per capsule, size and shape of grains and thousand grain weights.

3.1 Physical Properties

The average length and thickness of capsules were measured as 35 mm and 12 mm for TMV 7 variety. The average number of seeds in single capsule was determined as 60. The average 1000 grain weight was determined as 3.1 g. and the average size of the seed is $3 \times 1.8 \times 0.9$ mm (Table 2).

3.2 Combined Effect of Moisture Content, Roller Clearance and Feed Rate on Threshing Efficiency

Table 3 showed the combined effect of moisture content, roller clearance and feed rate. It is seen that the increase in moisture content and increase in feed rate at each roller clearance had significant effect on threshing efficiency varying the mean threshing efficiency from 89.90 to 95.90%. The maximum threshing efficiency of 96.7% could be achieved at a moisture content of 13.5% with a feed rate 180 kg h^{-1} and roller clearance 5 mm. The minimum threshing efficiency was 88.20% moisture content of 18.5%

with a feed rate 220 kg h^{-1} and roller clearance 10 mm.

From Table 3 it is seen that the main effects of each factor, viz., Moisture content (M), Roller clearance (C), and feed rate (R) were individually influencing on threshing efficiency at 1.00 per cent level. The interaction effect of M x C x R were influencing on threshing efficiency at 1.00 per cent level. The interaction effects R x M was not significant.

3.3 Combined Effect of Moisture Content, Roller Clearance and Feed Rate on Output Capacity

Table 4 showed the combined effect of moisture content, roller clearance and feed rate. It is seen that the increase in moisture content and increase in feed rate at each roller clearance had significant effect on output capacity varying the mean output capacity from 11.07 to 18.77 kg h^{-1} . The maximum output capacity of 22.8 kg h^{-1} could be achieved at a moisture content of 13.5% with a feed rate 220 kg h^{-1} and roller clearance 5 mm. The minimum output capacity was 9.2 kg h^{-1} moisture content of 18.5% with a feed rate 140 kg h^{-1} and roller clearance 5 mm. The effect of all the individual factors and combined effect of different combination of factors on threshing efficiency were statistically analyzed and the maximum threshing efficiency of 96.7 percent and output capacity of 18.2 kg h^{-1} was achieved at 5 mm clearance, 13.5 moisture content, 7.5 ms^{-1} roller speed and at a feed rate of 180 kg h^{-1} .

From Table 4 it is seen that the main effects of each factor, viz., Moisture content (M), Roller clearance (C), and feed rate (R) were individually influencing on output capacity at 1.00 per cent level. The interaction effect of M x C x R were influencing on output capacity at 1.00 per cent level. The interaction effects R x C was not significant.

3.4 Cost Economics

The cost of operating thresher was calculated by using standard procedure (BIS IS 9164: 1979).

3.4.1 Cost of threshing by manual method

Weight of grain threshed by women in one hour, kg	: 10
Total women hours per 100 kg	: 20
Cost of women labour per day, Rs.	: 200
Cost of threshing per 100 kg, Rs.	: 200/8 x 20 = 500
The cost of manual threshing is Rs.	: 500.

3.4.2 Cost of threshing by portable power sesame thresher

Cost of threshing per 100 kg using portable power operated sesame thresher (considering output as 18.20 kg/h)	: 39.14
Cost of threshing per 100 kg by Conventional method	: 500
Saving in cost, %	: 92
Saving in time, %	: 72

Table 2. Results of physical properties of sesame

Physical property	Minimum	maximum	Average
Length of capsule, mm	20	40	35
Thickness of capsule, mm	10	15	12
Seed Length, mm	2.8	3.3	3
Seed Breadth, mm	1.6	2.0	1.8
Seed Thickness, mm	0.7	1.2	0.9
Seeds per capsule, Nos.	56	65	60
1000 grain weight, g	2.8	3.6	3.2

Table 3. Interaction effects of M x C x R factor means on threshing efficiency, %

Feed rate (R), kg h ⁻¹	Moisture content (M), %			F-Mean
	13.5	16	18.5	
C= 5 mm				
140	95.7	95.5	94.5	95.23
180	96.7	95.3	93.5	95.17
220	94.7	93.1	92.0	93.27
C= 10 mm				
140	94.3	92.8	91.0	92.70
180	94.0	93.0	90.7	92.57
220	91.5	90.0	88.2	89.90
S-Mean	94.48	93.28	91.65	93.14
Pooled mean	93			

Table 4. Interaction effects of M x C x R factor means on output capacity, Kg h⁻¹

Feed rate (R), kg h ⁻¹	Moisture content (M), %			F-Mean
	13.5	16	18.5	
C= 5 mm				
140	13.2	10.8	9.2	11.07
180	18.2	16.5	15.4	16.70
220	22.8	21.6	19.5	21.30
C= 10 mm				
140	13.8	12.6	11.4	12.60
180	17.7	17.4	17.0	17.37
220	19.8	18.6	17.9	18.77
S-Mean	17.58	16.25	15.07	16.30
Pooled mean	16.3			

4. CONCLUSION

The physical properties of TMV 7 sesame variety viz., the average length and thickness of capsules were measured as 35 mm and 12 mm. The average number of seeds in single capsule and 1000 grain weight was determined as 60 and 3.1 g. respectively. The average size of the seed is 3×1.8× 0.9 mm. The developed portable power sesame thresher was field tested and its threshing efficiency and seed output capacity were 96.7% and 18.2 kg h⁻¹, respectively. The saving in cost and time were 92 and 72% respectively as compared to conventional method of manual threshing.

COMPETING INTERESTS

Authors have declared that no competing interests exist.

REFERENCES

1. Annual statistical abstract of Tamil Nadu. Ministry of Agriculture. Government of Tamil Nadu; 2005.
2. Zebib H, Bultosa G, Abera S. Physico-chemical properties of sesame varieties grown in northern area, Ethiopia. *Agricultural Sciences*. 2015;6:238-246.
3. Darvishi H. Moisture-dependent physical and mechanical properties of white sesame seed. *American-Eurasian. J. Agric. & Environ. Sci*. 2012;12(2):198-203.
4. Yilmaz D, Akinci I, Cagircan MI. Effect of some threshing parameters on sesame separation. *Agricultural Engineering International: The CIGR Ejournal*. 2008;10: 08004.
5. Hyun KN. Separation characteristic of shatter resistant sesame after threshing. *Journal of Biosystems Engineering*. 2014; 39(4):299-303.
6. Olugboji OA. Development of a Rice Threshing Machine. *AU JT*. 2004;8(2):75-80.
7. Abhishek P, Stevens RM. Performance evaluation of high capacity multi crop thresher on 'gram' crop. *International Journal of Agricultural Engineering*. 2016; 9(1):94-101.
8. Lee JS, Kim, KB. Development of shattering machine for sesame (iii)-fabrication and evaluation of the final machine. *Biosystems Engineering*. 2009;34(6):425-433.
9. Tiwari RK, Din M, Kumar M. Power threshers for effective threshing of crops since green revolution-a review. *International Journal of Agriculture Sciences*. 2018;10(15):6793-6795.
10. Naik RK, Patel S, Verma AK, Srivastva AK. Effect of crop and machine parameters on performance of paddy thresher. *Agricultural Engineering Today*. 2010; 34(1).
11. IS 11234:1985 Test codes for power thresher for groundnut.
12. Indian directorate of economics and statistics. India sesame Estimates. Government of India; 2000. Available:<http://agricoop.gov.in/sites/default/files/agristatglance2018.pdf>
13. Indian Standard: 9129:1979. Technical requirements for safe feeding systems for power threshers.
14. BIS IS 9164: 1979 (R2002). Guide for estimating cost of farm machinery operation.

© 2019 Dhananchezhiyan et al.; This is an Open Access article distributed under the terms of the Creative Commons Attribution License (<http://creativecommons.org/licenses/by/4.0>), which permits unrestricted use, distribution, and reproduction in any medium, provided the original work is properly cited.

Peer-review history:

The peer review history for this paper can be accessed here:
<http://www.sdiarticle4.com/review-history/53798>